

12032



120x120x32mm

※ General Specification (一般规格)

Material:

Frame And Impeller: Thermal Plastic UL 94V-0

Lead Wires: UL Type

RED Wire Positive (+)

BLACK Wire Negative (-)

Insulation Resistance: 10MΩ Or Over With a DC250V Megger


Dielectric Withstand Voltage: AC500V 1S

Allowable Ambient Temperature Range:


-10°C ~ +70°C (Operation)

-20°C ~ +80°C (Storage)

※ Dimensions Drawing(外观图) Unit:mm

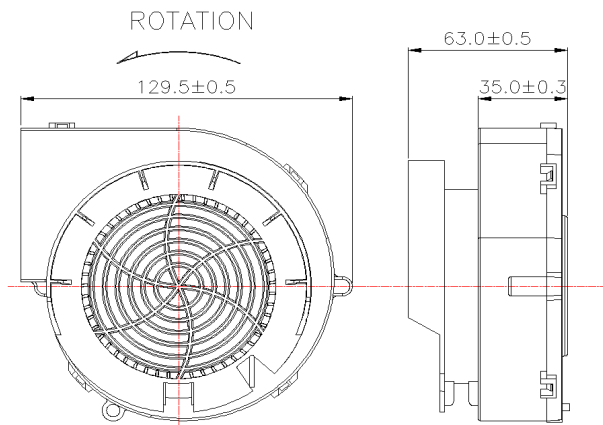

※ Characteristic Curves(特性曲线)

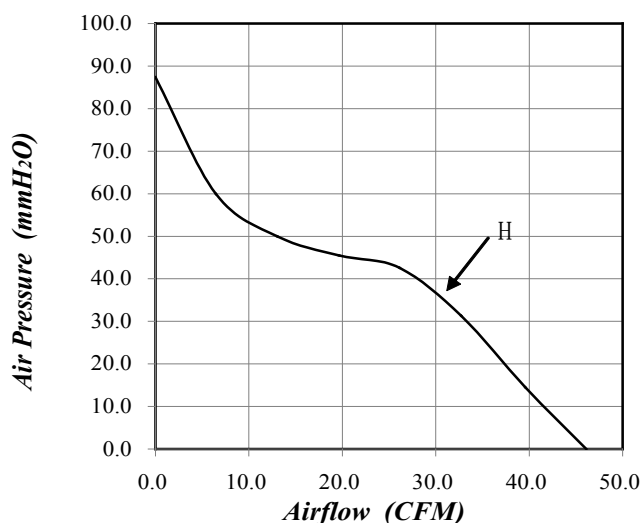

※ Specifications(规格)

型号 Model	轴承类型 Bearing Type	电压 Rated Voltage VDC	电压范围 Operation Voltage VDC	电流 Current A	转数 Speed RPM	风量 Air Flow CFM	风压 Static Pressure mmH ₂ O	噪音 Noise Level dBA	重量 Weight g
CD1232HS2.5A	Sleeve	12	10.8-13.2	2.5	4800	47.63	87.39	60.6	226
CD1232HS2.0A				2	4300	42.67	70.13	58.2	
CD1232HS1.7A				1.7	3900	38.68	57.66	56	
CD1232HS1.5A				1.5	3700	36.71	51.92	53.7	
CD1232HS1.4A				1.4	3500	34.73	46.46	53.1	
CD1232HS1.3A				1.3	3400	33.74	53.84	52.4	
CD1232HS1.2A				1.2	3300	32.75	41.3	51.8	
CD1232HS1.0A				1	3200	31.75	38.84	51.1	
CD1232MS0.8A				0.8	2900	28.78	22.58	49.6	

Notes: 1.Specifications subject to change without notice;
2.Design and provide products according to customer requirements.

