

7530



75x75x30mm

※ General Specification (一般规格)

Material:

Frame And Impeller: Thermal Plastic UL 94V-0

Lead Wires: UL Type

RED Wire Positive (+)

BLACK Wire Negative (-)

Insulation Resistance: 10MΩ Or Over With a DC250V Megger


Dielectric Withstand Voltage: AC500V 1S

Allowable Ambient Temperature Range:


-10°C ~ +70°C (Operation)

-20°C ~ +80°C (Storage)

※ Dimensions Drawing(外观图) Unit:mm

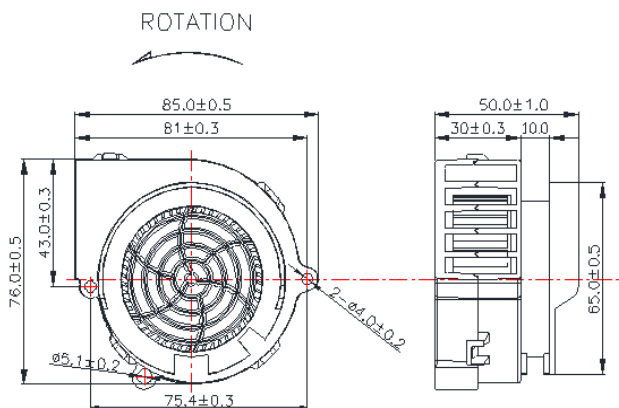

※ Characteristic Curves(特性曲线)

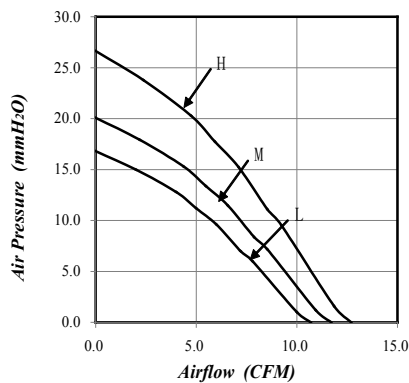

※ Specifications(规格)

型号 Model	轴承类型 Bearing Type	电压 Rated Voltage VDC	电压范围 Operation Voltage VDC	电流 Current A	转速 Speed RPM	风量 Air Flow CFM	风压 Static Pressure mmH ₂ O	噪音 Noise Level dBA	重量 Weight g
CD7530HS0.6A	Sleeve	12	10.8-13.2	0.6	5100	12.7	26.63	49.9	86.5
CD7530HS0.5A				0.5	4700	11.71	20.07	48.1	
CD7530LS0.4A				0.4	4300	10.71	16.8	50.2	

Notes: 1.Specifications subject to change without notice;
2.Design and provide products according to customer requirements.

