

9733



97x95x33mm

※ General Specification (一般规格)

Material:

Frame And Impeller: Thermal Plastic UL 94V-0

Lead Wires: UL Type

RED Wire Positive (+)

BLACK Wire Negative (-)

Insulation Resistance: 10MΩ Or Over With a DC250V Megger


Dielectric Withstand Voltage: AC500V 1S

Allowable Ambient Temperature Range:


-10°C ~ +70°C (Operation)

-20°C ~ +80°C (Storage)

※ Dimensions Drawing(外观图) Unit:mm

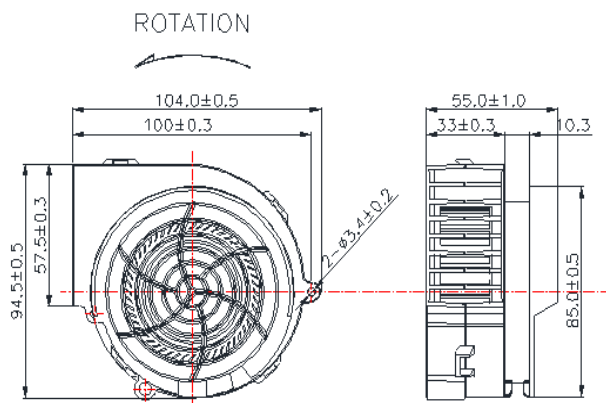

※ Characteristic Curves(特性曲线)

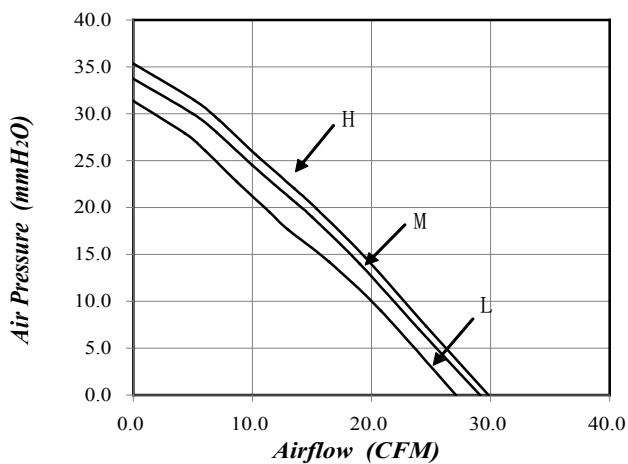

※ Specifications(规格)

型号 Model	轴承类型 Bearing Type	电压 Rated Voltage VDC	电压范围 Operation Voltage VDC	电流 Current A	转速 Speed RPM	风量 Air Flow CFM	风压 Static Pressure mmH ₂ O	噪音 Noise Level dBA	重量 Weight g
CD9733HS1.0A	Sleeve	12	10.8-13.2	1	4500	29.82	35.36	54	128
CD9733DS0.8A				0.8	4300	29.12	33.74	53.5	
CD9733MS0.6A				0.6	4000	27.09	29.2	52.2	

Notes: 1.Specifications subject to change without notice;
2.Design and provide products according to customer requirements.

